

A Division of the Angelus Corporation  
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com  
 N220 W1051 Springdale Road, Waukesha, WI 53186

Approved : *FMB*

Date : 05/14/01

Rev : 6 (06/21/22)


Distribution : USER

Uncontrolled if Printed

### D-Sub Size 8 Socket (Receptacle) Contact

for S83204, S86208 / S88207

Note: Use with PIC P/N 110286, D-Sub Size 8 (Pin) Contact

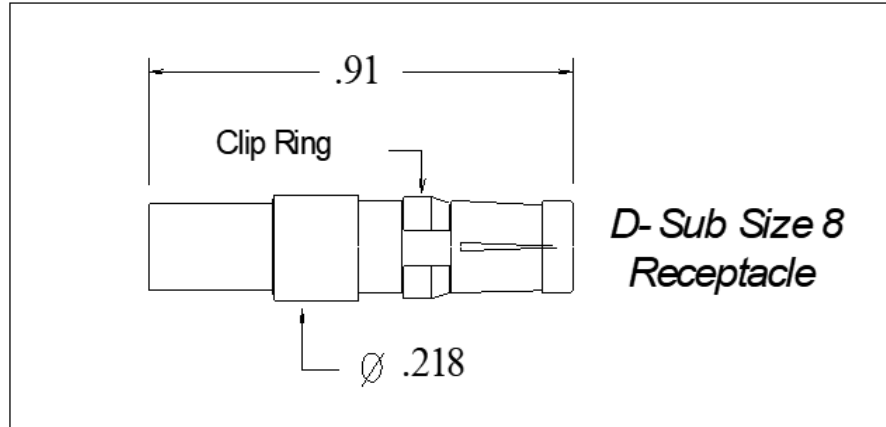

#### PERFORMANCE

Impedance : Non-constant  
 Frequency Range : 0 - 1 GHz  
 Insertion Loss (max) : 0.5 dB  
 Voltage Rating : 1000 V(rms)  
 Insulation Resistance : 5000 Megohms min.  
 DW Voltage : 1500 V(rms)

#### CONNECTOR WEIGHT (Each)

0.09 ounces (2.55 grams)

#### RoHS Compliant

Complies with RoHS Standards

#### INSTALLATION (Tooling)

##### Center Contact

M22520 / 2 - 01 Crimp Tool :  
 Selector Dial @ # 7  
 Recommended Positioner :  
 PIC P/N 110254, (Daniels # K426)

##### Crimp Ferrule

M22520 / 5 - 01 Crimp Tool :  
 Die Set M22520 / 5 - 41  
 Cavity B (.178" hex)  
 PIC P/N 110333, (Daniels # Y140)

#### CONSTRUCTION

##### **Materials:**

Body	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Center Contact	Brass, ASTM-B16, Alloy UNS 36000, H02
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 2, Grade 1, Class A
Clip Ring	Beryllium Copper, ASTM-B194

##### **Finish :**

Body, Center Contact, Ferrule	Gold
Clip Ring	Nickel

#### APPLICABLE STANDARDS

IDS-15  
 MIL-DTL-24308

##### **Notes :**

1) Please refer to T-DSub 50 Termination Instruction sheet for strip dimensions & instructions.

2) Recommended Removal Tools :

Palco P/N T0100-K.  
 Positronics P/N 4311-0-0-0  
 ITT P/N CET-C6B