


A Division of the Angelus Corporation  
 Ph (262) 246-0500 Fax (262) 246-0450 www.picwire.com  
 PO Box 330 Sussex, WI 53089

Approved : 



Date 09/13/96

Rev. 6 (06/17/14)

Distribution : USER

Uncontrolled Document

**N Bulkhead Jack**  
 for S33141

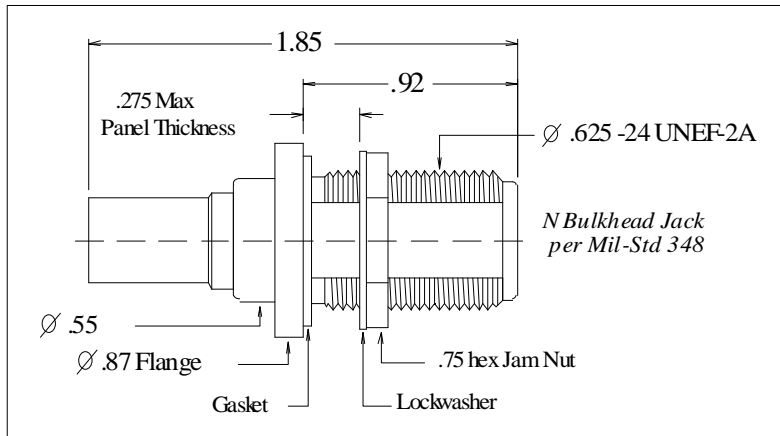

**PERFORMANCE**

Nominal Impedance	50 Ohms
Frequency Range	0 - 12 GHz
Voltage Rating	1000 VRMS
Insulation Resistance	5000 Megohms

**CONNECTOR WEIGHT (Each)**

1.64 ounces (46.49 grams)

**RoHS COMPLIANT**

Complies to RoHS Standards

**INSTALLATION**

Recommended Jam Nut Torque - 35 to 40 in. lbs.

<b>Pic Die Set</b>	<b>MIL Spec Die Set</b>
Center Contact	Center Contact
M22520 / 5 - 01 Tool,	M22520 / 5-01 Tool,
PIC 190318 Hex Crimp Die	MIL Spec *M22520 / 5-29
(.098 hex)	(.100 B hex)
<b>Crimp Ferrule</b>	<b>Crimp Ferrule</b>
M22520 / 5 - 01 Tool,	M22520 / 5-01 Tool,
PIC 190318 Hex Crimp Die	MIL Spec *M22520 / 5-29
(.324/.392 hex)	(.324 A hex)

\* Note - MIL Spec die to be used on the smaller diameter area of ferrule only. Not the larger "Bell" area on end.

**CONSTRUCTION**

**Materials:**

Body	Brass, ASTM-B16, Alloy UNS 36000, H02
Center Contact	Beryllium Copper, ASTM-B196, Alloy UNS C17300
Ferrule	Brass, ASTM-B16, Alloy UNS 36000, Dead Soft, Weatherseals included
Dielectric	TFE Fluorocarbon, ASTM-D1710, Type 1, Grade 1
Hardware	Jam Nut, Lk Wshr, Grommet

**Finish :**

Body, Ferrule	Nickel
Center Contact	Gold

**Applicable Standards**

MIL-STD 348  
 MIL-PRF-39012

**Notes :**

- 1) A 2.5" piece of Raychem ATUM heat shrink P/N ATUM-16/4-0 provided with connector for purpose of strain relief & moisture protection.
- 2) Please refer to T-190XXX Termination Instruction sheet for strip dimensions & instructions.