


PIC Wire & Cable	Connector Specification	P/N 190912
<i>A Division of the Angelus Corporation</i> Ph: (262) 246-0500 Fax: (262) 246-0450 www.picwire.com W220 N1051 Sprindale Rd, Waukesha, WI 53089	Approved : <i>PFT</i>	Date 02/21/12
	Distribution : USER	Rev. 3 (01/19/22)
		Uncontrolled Document

BNC Straight Plug
for V78209

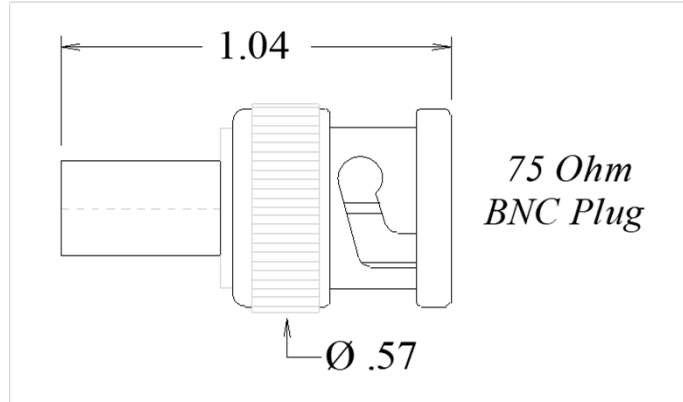

Features Not Shown: Gasket in front

PERFORMANCE

Impedance	75 Ohms
Frequency Range	0 - 3 GHz
Voltage Rating	500 VRMS
Insulation Resistance	5000 Megohms

CONNECTOR WEIGHT (Each)

.38 ounces (10.89 grams)

RoHS COMPLIANT

Complies to RoHS Standards

INSTALLATION

Crimp Tooling:

Center Contact M22520 / 1 - 01 Tool,
Selector Dial @ # 3
Recommended Positioner :
PIC # 110656 (Daniels # TH729),
Selector @ Green

Crimp Ferrule M22520 / 5 - 01 Tool,
Die Set M22520 / 5 - 59 ,
PIC P/N 110697
Cavity A (.255" hex)

CONSTRUCTION

Materials:

Body	Brass, ASTM-B16
Center Contact	Brass, ASTM-B16
Outer Contact	Beryllium Copper, ASTM-B196
Ferrule	Copper, Alloy 122
Dielectric	TFE Fluorocarbon, ASTM-D1710

Finish :

Body, Ferrule	Bright Nickel
Center Contact	Gold

Applicable Standards Mil-Std 348, MIL-PRF-39012

Notes :

1) Please refer to T-1909XX Termination Instruction sheet for strip dimensions & instructions.