



TAS 600 SERIES/9900BX TAS RF CABLE WORKSHEET

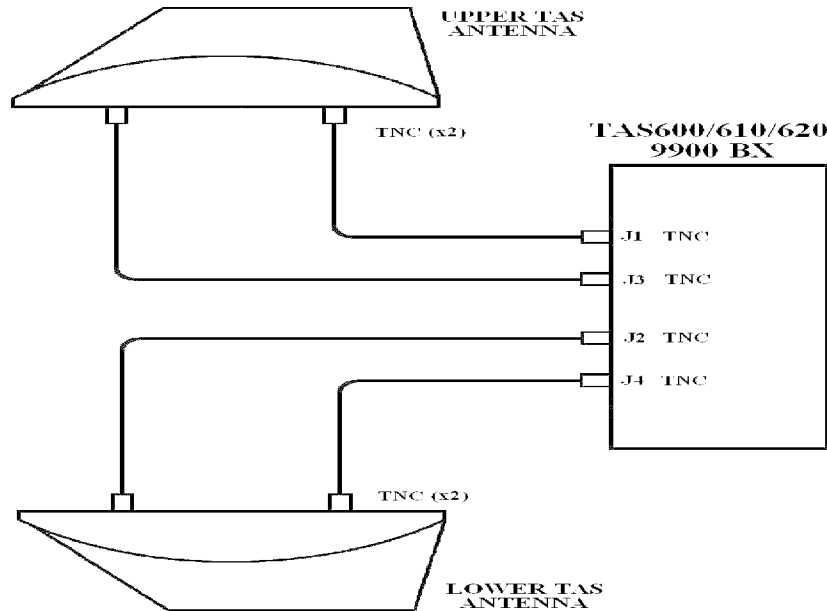

Cable (Test) Requirements :

Insertion Loss : 3.0 dB +/- 0.5 for each cable @ 1 GHz.
 VSWR : 1.5:1 Max for each cable @ 1 GHz.
 Note : All 4 cables to be the same length

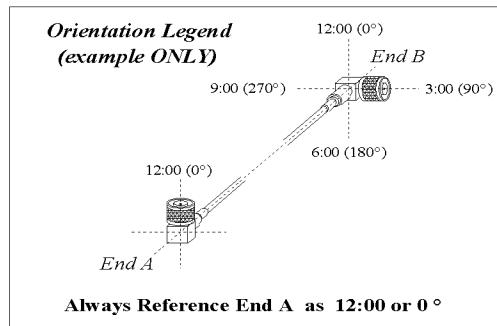

UPPER ANT. INFO:

UPPER ANT. CABLE LENGTH : _____

CONN. ANGLE @ UPPER ANT. : _____

CONN. ANGLE @ LRU. : _____

*CONNECTOR ORIENTATION: _____

LOWER ANT. INFO:

LOWER ANT. CABLE LENGTH : _____

CONN. ANGLE @ LOWER ANT. : _____

CONN. ANGLE @ LRU. : _____

*CONNECTOR ORIENTATION: _____

LABELING: Standard labeling is P/N, S/N & connection Info.

***Connector Orientation**

(Assemblies ≤ 20 ft with (2) 90° Connectors)
 Configuration Depicted : End B is **3:00 or 90°** from end A.

CUSTOMER INFORMATION:

CUSTOMER : _____

CONTACT : _____

PH # : _____

DATE : _____

NEED CABLES BY : _____

NEED QUOTE BY : _____